

# **MANCHESTER FOYER** SHALE GREY

**DESCRIPTION:** Fireplace **TEXTURE:** Smooth

Top Section (with chimney)	imperial	metric
Approx. Weight	2 134 lbs	968 kg
Height	53 ¼ in	1 353 mm
Width	52 in	1 321 mm
Depth	32 in	813 mm

Woodbox (With York Cap)	imperial	metric
Approx. Weight	1 568 lbs	711 kg
Height	30 ¼ in	768 mm
Width	33 in	838 mm
Depth	34 in	864 mm

Bottom Section	imperial	metric
Approx. Weight	4 985 lbs	2 261 kg
Height	43 ½ in	1 105 mm
Width	59 in	1 499 mm
Depth	43 in	1 092 mm




#### **NOTES**

See 115 for more technical information.




Report number: 0538WF001S UL-127 & ULC-S610 compliant

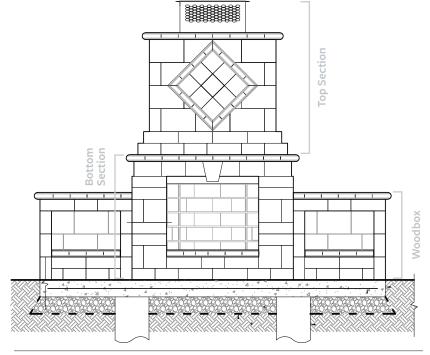

FRONT


## **INSTALLATION GUIDE**


### MANCHESTER FOYER SHALE GREY (PRE-ASSEMBLED KIT)

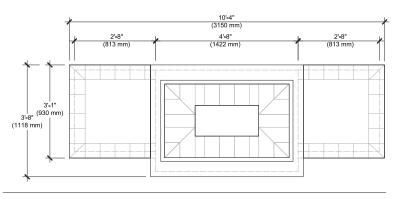

TOP

- **A.** CAST IN PLACE CONCRETE SLAB 30 MPa 150 mm (6") THICK
- **B.** 152 × 152 MW 18.7 × MW 18.7 (6 × 6-W2.9 × W2.9) WELDED WIRE MESH AS PER SITE CONDITIONS
- C. 300 mm (12") Ø CONCRETE PILLAR FOUNDATION EXTENDED TO 150 mm (6") BELOW FROST LINE AS PER SITE CONDITIONS AND LOCAL BUILDING REGULATIONS
- **D.** 20 mm (3/4") CLEAN STONE 150 mm (6") THICK MIN. AS PER SITE CONDITIONS
- E. NATURAL SOIL OR COMPACTED BACKFILL
- F. GEOTEXTILE

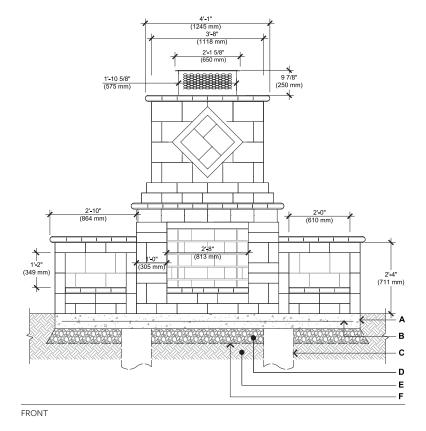

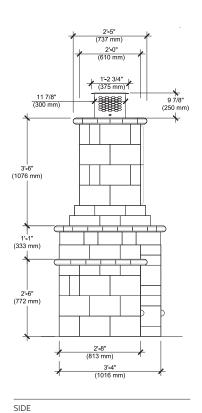

Consult our Installation Guide in our website for a detail step by step installation.

The installer must ensure that the installation and use of the fireplace comply with local regulations and code requirements. Concrete pillars extending to frost line may be required as per local code. Check your local building code before installing.





# MANCHESTER FOYER CHESTNUT BROWN

**DESCRIPTION:** Fireplace **TEXTURE:** Smooth

Top Section (with chimney)	imperial	metric
Approx. Weight	2 134 lbs	968 kg
Height	53 ¾ in	1 356 mm
Width	52 in	1 321 mm
Depth	32 in	813 mm

Woodbox (With Bullnose Cap)	imperial	metric
Approx. Weight	1 568 lbs	711 kg
Height	30 ¾ in	772 mm
Width	34 in	864 mm
Depth	36 % in	930 mm

Bottom Section	imperial	metric
Approx. Weight	4 985 lbs	2 261 kg
Height	43 ½ in	1 105 mm
Width	60 ½ in	1 527 mm
Depth	44 in	1 118 mm




#### **NOTES**

See 117 for more technical information.



Report number: 0538WF001S

UL-127 & ULC-S610 compliant

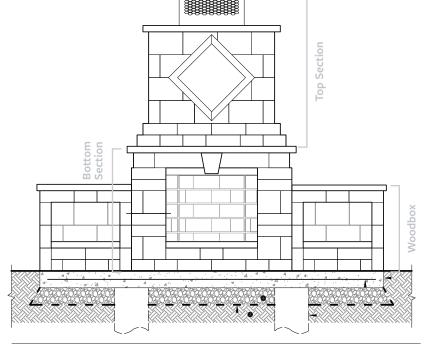

FRONT







techo-bloc.com


## **INSTALLATION GUIDE**

### MANCHESTER FOYER CHESTNUT BROWN (PRE-ASSEMBLED KIT)

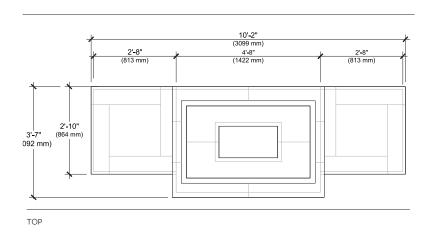

- **A.** CAST IN PLACE CONCRETE SLAB 30 MPa 150 mm (6") THICK
- **B.** 152 × 152 MW 18.7 × MW 18.7 (6 × 6-W2.9 × W2.9) WELDED WIRE MESH AS PER SITE CONDITIONS
- C. 300 mm (12") Ø CONCRETE PILLAR FOUNDATION EXTENDED TO 150 mm (6") BELOW FROST LINE AS PER SITE CONDITIONS AND LOCAL BUILDING REGULATIONS
- **D.** 20 mm (3/4") CLEAN STONE 150 mm (6") THICK MIN. AS PER SITE CONDITIONS
- E. NATURAL SOIL OR COMPACTED BACKFILL
- F. GEOTEXTILE

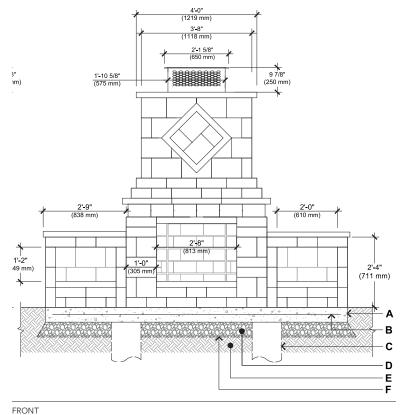

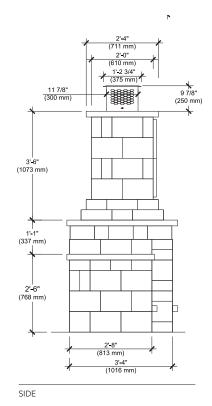

Consult our Installation Guide in our website for a detail step by step installation.

The installer must ensure that the installation and use of the fireplace comply with local regulations and code requirements. Concrete pillars extending to frost line may be required as per local code. Check your local building code before installing.