








# Melville® 24 x 24 Slab




-  Do not use vibrating plate
-  Pedestrian - Designed to withstand pedestrian traffic
-  Roof-top patio - Designed to be installed on pedestals
-  **Techniseal** 1 bag of sand covers approx. 271 ft<sup>2</sup>

## Melville® 24 x 24 Slab

	DIMENSIONS (MM)	DIMENSIONS (IN)	CODES	COLOURS	TYPICAL ROW
	60 x 610 x 610	2 3/8 x 24 x 24	<b>PRESTIGE COLOURS</b>		
Weight/unit	52 kg	115 lb	12051239	Range Bayona Grey (1)	
Surface/unit	0.37 m <sup>2</sup>	4 ft <sup>2</sup>	12051241	Blizzard (2)	
Area/layer	0.74 m <sup>2</sup>	8 ft <sup>2</sup>	12051242	Range Amber Beige (1)	
<b>Area/cube</b>	<b>8.92 m<sup>2</sup></b>	<b>12 Rows</b>	Sold in full cubes only		
Qty/cube	24 units	24 units	Can be double stacked		
Weight/cube	1232 kg	2717 lb	Production locations: Cambridge (1) Metcalf (2)		

### LAYING PATTERNS

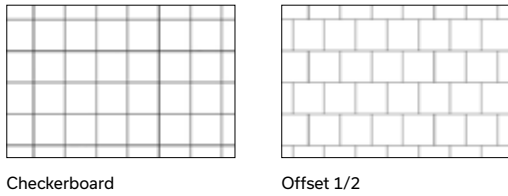

Checkerboard

Offset 1/2

### TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
<b>Melville 24 x 24 Slab</b>	CSA A231.1	±4.5 MPa	N/A	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

\* Concave or convex warpage in one dimension: up to and including 450 mm: 2.0 mm / over 450 mm: 3.00 mm

Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material. Given the weight of this slab, it is highly recommended to use suction-based lifting equipment for handling and placement (avoid manual installation). This product can be installed on pedestals for a rooftop application. It can safely withstand a load of up to 300 kg.